



pro audio



MLA218S MLA218SA Line Array System

FEATURES

- High quality plywood with polyurea paint
- Bass reflex and horn-loaded design
- Compact vented sub-bass
- Good used for stadiums, big scale performance, conference centers and odeums

产品特征

- 高质量单元配置，高强度夹板箱体
- 综合式设计，低音丰富自然
- 超长品质保证期：品质与信心的保证

适用范围



- 配合MLA212线性阵列扬声器系统，增加低音表现
- 大型演出、体育场馆
- 流动演出、乐队扩声、剧院、音乐厅演艺中心

The **MLA218S** is a dual 15" low frequency enclosure designed for sub-bass reinforcement to MLA212, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminum alloy. The **MLA218SA** is equipped with BA2.88 digital amplifier module based on MLA218S to be an active subwoofer .

MLA218S是一款双18"超低音箱。采用两只18" 100芯低音单元，综合式箱体设计，吊挂系统采用铝合金材质，与MLA212配合，可吊挂、可堆码，以提升系统低频表现，箱体采用多层复合夹板，聚脲喷涂。MLA218SA是在MLA218S的基础上配置BA2.88功放组件成为有源音箱。



CONFIGURATION

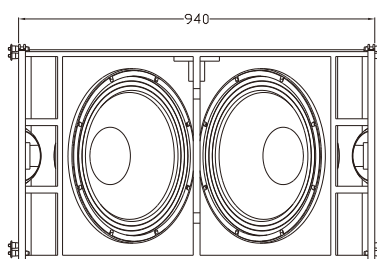

MODEL

FREQUENCY RESPONSE(-3dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

MLA218S

35Hz-150Hz

2×18"(460mm)/4"voice coil LF

1200W RMS,4800W peak

103dB 1watt/1meter

134dB continuous,140dB peak

4 ohms nominal

2×Speakon NL4

1030mm×850mm×655mm

77 kg/pc

87 kg/pc

MLA218SA

35Hz-150Hz

2×18"(460mm)/4"voice coil LF

1200W/4Ω+1200W/4Ω

--

134dB continuous,140dB peak

--

INPUT TYPE:Balanced Differential line

1030mm×850mm×655mm

80 kg/pc

99 kg/pc