


U series U106VI

Two-way Loudspeaker System

The U106VI is a 6.5", small sized, light weight, two way full range speaker, featuring with flexible installation and balanced sound. Unit configuration: 1x6.5" high efficiency mid-bass unit, 1x1" exit throat 25mm mylar diaphragm HF driver with 110° x 50° rotatable horn. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint.

U106VI是一款6.5"两分音全频音箱，具有体积小，重量轻，安装灵活，音质平衡等特点。单元配置：1只6.5"高效率中低音单元，1只1"喉口25芯高分子聚酯膜高音驱动器配置110° x 50°可旋转号角。箱体采用多层复合夹板，耐磨聚脲喷涂。

CONFIGURATION

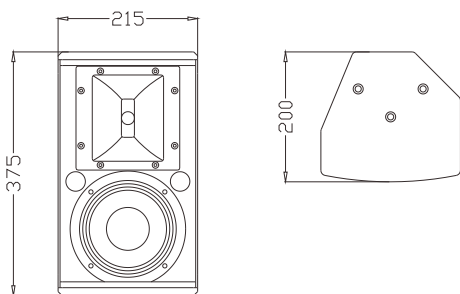

FEATURES

- High quality unit configuration, high strength plywood housing
- Small size, light weight, easy handling and fixed installation
- Multi-hanging points and support, easy and quick operation
- Applications: speech reinforcement, conference rooms, background music, bars and monitor speaker for small stage

产品特征

- 高质量单元配置，高强度夹板箱体
- 体积小、重量轻便于搬运和固定安装
- 多吊挂点与支撑配合，操作简易快捷

适用范围

- 语言扩声、会议室
- 背景音乐，酒吧
- 小型舞台返送音箱



MODEL
FREQUENCY RESPONSE(-3dB)
FREQUENCY RESPONSE(-10dB)
DRIVERS

RATED POWER
SENSITIVITY
MAXIMUM SPL
IMPEDANCE
DISPERSION(-6dB)
CROSSOVER FREQUENCIES
INPUT CONNECTORS
PACKAGE SIZE
NET WEIGHT
GROSS WEIGHT

U106VI
 90 Hz-18kHz
 85Hz-20KHz
 1×6.5"(165mm)/2"voice coil LF
 1×1"(25mm)/1"voice coil HF
 120W RMS,480W peak
 90dB 1watt/1 metre
 111dB continuous,117 dB peak
 8 ohms nominal
 110°×50°
 2.5kHz passive
 Covered barrier strip terminals
 510mm×285mm×450mm(carton/pair)
 6 kg/pc
 15 kg/pair